


2 NO. 4 EPOXY  
COATED REBAR  
AT 15' LENGTHS  
(TYP.)

CONCRETE ADJUSTMENT RINGS SHALL  
BE SEALED TO THE CONE, CASTING,  
AND ONE ANOTHER BY USING A  
PREPACKAGED MOTOR MIX. TOTAL  
ADJUSTMENT MINIMUM 4" MAX 14".  
CONCRETE RINGS SHALL ALSO BE  
COMPLETELY ENCLOSED IN A  
CONCRETE COLLAR 4" THICK.

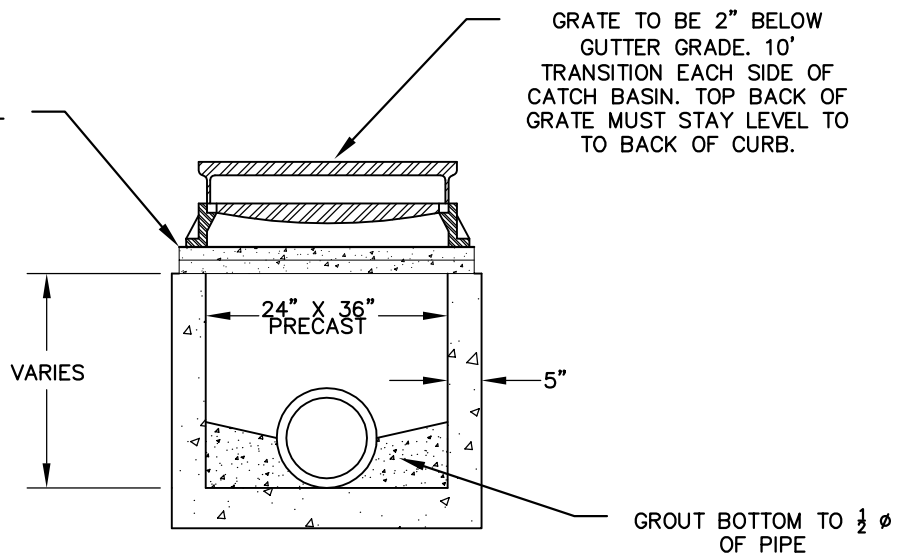

**NOTES:**

FRAME AND GRATE FOR BULKHEAD STYLE CURB SHALL BE A NEENAH R-3067-V OR  
NEENAH R-3067-VB

FRAME AND GRATE FOR SURMOUNTABLE STYLE CURB OR DRIVEWAYS SHALL BE A  
NEENAH R-3501-TR OR R-3501-TL. LOW POINTS SHALL BE R-3501-TB

FRAME AND GRATE FOR OFF ROAD LOCATION (DITCH GRATE, STOOL TYPE) R-4342

DOG HOUSES SHALL BE GROUTED ON BOTH THE OUTSIDE AND INSIDE OF THE STRUCTURE



City of  
**Maple Grove**

LAST REVISION  
NOVEMBER 2014

## CATCH BASIN 2'X3'

CITY OF MAPLE GROVE ENGINEERING  
& PUBLIC WORKS DEPARTMENTS

STANDARD  
PLATE #  
STS-2